


NAMONKAR ENTERPRISES

Namonkar NM Sleeving


Namonkar NM sleeving

Namonkar NM consist of 100% continuous nomex fiber. Although it's soft feel and smooth appearance, nomex sleeving is extremely tough and provides cables with both thermal protection and high abrasion-resistance. It can retain its integrity at temperatures over 245"C (close to the melting point of Nylon) or exposed to high humidity, moisture or extreme temperature

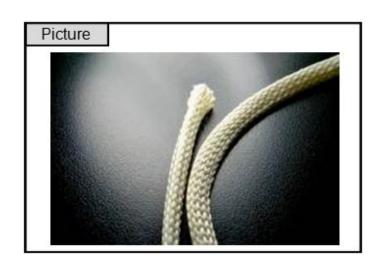

<u>Application</u>

Used for a wide range of applications such as military, aerospace, race car, fire department to protect the cable and wire from the dangers that come with working in and around intense flame and heat.

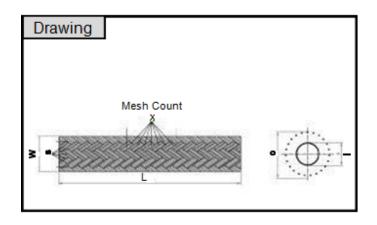



NAMONKAR ENTERPRISES

Technical Data Sheet

| Flammability | UL94V-0 | |
|-----------------|--------------------------|--|
| Standard colour | white | |
| Certificate | RoHS, Halogen free | |
| Cutting tool | shears | |
| Others features | Resistant to most acids, | |
| | alkalis, bleaching | |
| | agents,unaffected | |
| | by freon, gasoline, | |
| | jet fuel, ethylene | |
| | glycol and | |

| Part No. | Normal Size (W) | Expanded range (I to O) | Packing (L) |
|-----------------|-----------------|-------------------------|-------------|
| Namonkar NM- 3 | 3 | 1 - 4 | 500 m/roll |
| Namonkar NM- 6 | 6 | 5 – 8 | 500 m/roll |
| Namonkar NM- 8 | 8 | 6 – 10 | 500 m/roll |
| Namonkar NM- 10 | 10 | 7 – 13 | 500 m/roll |
| Namonkar NM- 12 | 12 | 8 – 16 | 500 m/roll |
| Namonkar NM- 15 | 15 | 10 – 20 | 500 m/roll |
| Namonkar NM- 20 | 20 | 14 – 26 | 500 m/roll |
| Namonkar NM- 25 | 25 | 18 - 33 | 500 m/roll |
| Namonkar NM- 30 | 30 | 20 – 39 | 500 m/roll |
| Namonkar NM- 40 | 40 | 30 – 52 | 500 m/roll |
| Namonkar NM- 50 | 50 | 40 - 65 | 500 m/roll |

Unit: mm