

NAMONKAR ENTERPRISES


Namonkar ST


Namonkar ST


Namonkar ST is extruded from a soft and flexible elastomer. It offers excellent abrasion resistance, kink resistance with good strength and flexibility. It generally resists many solvents, oils, concentrated acids diluted sodium hydroxide, being no tainting of the product is very important and ideal in medical field, food and the dairy industry.

Application

It can be not only widely used for liquid and air transmission in medical and food industrial, but also for insulation protection in household appliance, industrial appliance etc.

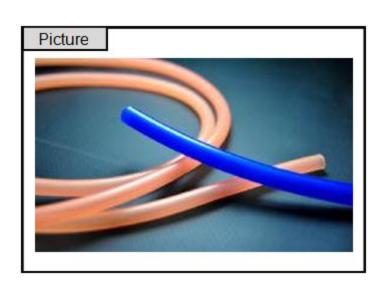

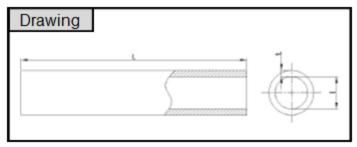



Other features

3, Raghunandan Complex, Mantarwadi Phata, Phursungi, PUNE - 412308, Email - akrjain1202@gmail.com

-resistance



NAMONKAR ENTERPRISES

INDUCATE STEMINATE SUMPLE SIDEM IN T

Data Sheet:-

Part No.	I.D. (I)	Thi	Da also sin s (L)			
		2500V	4000V	6000V	7000V	Packaging (L)
Namonkar ST- 0.8	0.8	0.5	1	1.5	2	200 m/spool
Namonkar ST- 1	1	0.5	1	1.5	2	200 m/spool
Namonkar ST- 1.5	1.5	0.5	1	1.5	2	200 m/spool
Namonkar ST- 2	2	0.5	1	1.5	2	100 m/spool
Namonkar ST- 2.5	2.5	0.5	1	1.5	2	100 m/spool
Namonkar ST- 3	3	0.5	1	1.5	2	100 m/spool
Namonkar ST- 3.5	3.5	0.5	1	1.5	2	100 m/spool
Namonkar ST- 4	4	0.5	1	1.5	2	100 m/spool
Namonkar ST- 4.5	4.5	0.5	1	1.5	2	100 m/spool
Namonkar ST- 5	5	0.5	1	1.5	2	50 m/spool
Namonkar ST- 5.5	5.5	0.5	1	1.5	2	50 m/spool
Namonkar ST- 6	6	0.5	1	1.5	2	50 m/spool
Namonkar ST- 7	7	-	1	1.5	2	50 m/spool
Namonkar ST- 8	8	-	1	1.5	2	50 m/spool
Namonkar ST- 9	9	-	1	1.5	2	20 m/spool
Namonkar ST- 10	10	-	1	1.5	2	50 m/spool



NAMONKAR ENTERPRISES

INSULATE • TERMINATE • BUNDLE • IDENTIFY

Namonkar ST- 12	12	-	1	1.5	2	20 m/spool
Namonkar ST- 14	14	-	-	1.5	2	50 m/spool
Namonkar ST- 15	15	-	-	1.5	2	20 m/spool
Namonkar ST- 20	20	-	-	-	2	10 m/spool

Unit: mm